

Product information



IT WORKS.

BALLISTOL SILICONE OIL

Product Features

Special lubrication and care for plastics or sliding combinations of different materials

Special Features

Lubricates and protects parts made of rubber, polymers, plastics and metals

Eliminates squeaking and creaking noises

Also ideal for maintenance and restoration

65 ml version with fine dosing tip

Does not contain acids

Application / Practical Tips

Tried and tested on plastic gearwheels, plastic gears, rubber bearings, slide rails, rollers and slideways

Can also be used on cable pulls, rubber strips, window seals and cellular rubber seals on car doors and hoods

Useable in the food processing industry

Special tip: Also suitable for acrylic painting

Temperature range: -50 °C to approx. +150 °C



Available as

art.no.

65 ml	25331
Spray 200 ml	25300
Spray 400 ml	25307
Canister 5 litre	25910

Physical and Chemical Characteristics

Appearance: colourless, clear

Odour: Liquid: almost odourless / Spray: solvent-like

Boiling range: Spray: approx. 60 °C (active substance, without consideration of the propellant)

Melting temperature: Spray: < -154 °C (DIN/ISO 3016; active substance, without taking propellant into account)

Lower explosion limit: Spray: approx. 1 vol-% (solvent)

Upper explosion limit: Spray: approx. 7.4 vol-% (solvent)

Vapour pressure: Spray: approx. 250 hPa (at 20 °C)

Relative density: Liquid: approx. 0.96 g/cm³ (at 20 °C) / Spray: approx. 0.74 g/cm³ (at 20 °C; regarding liquid phase)


Viscosity kinematic: Liquid: approx. 85 mm²/s (at 20 °C)

Hazard Statement

Liquid: / **Spray:** Highly flammable aerosol. Pressurised container: May burst if heated. Causes skin irritation. May cause respiratory irritation. May cause drowsiness or dizziness. Toxic to aquatic life with long lasting effects.

Important Product Advantages

- Very economical due to high silicone content
- Also suitable for food-related areas or acrylic painting
- Adheres strongly and permanently to surfaces
- Free from animal oils
- Tested material compatibility for all technical, industrial and automotive materials
- Colourless and odourless
- Water-repellent

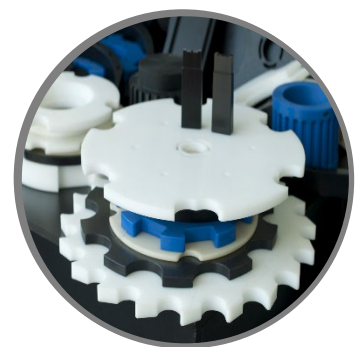

Other products among BALLISTOL's technical products

Premium Rust Protection Oil
Multifunctional Garage Oil
Copper Graphite Spray
Fine Mechanical Oil
Grinding Oil



BALLISTOL GmbH
Ballistolweg 1
D-84168 Aham
Tel. +49 (0) 8744 9699-0
Fax +49 (0) 8744 9699-99
info@ballistol.de
www.ballistol.de/shop/en